



LED DOWNLIGHT


VEC-46300/VEC-46313

VECTA


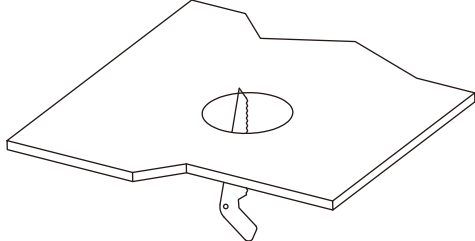
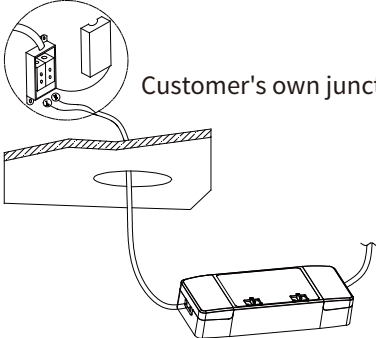
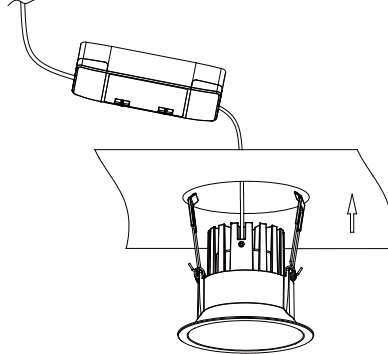
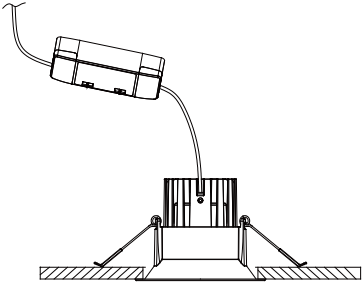




WARNING ⚡

1. Switch off before installation.
2. Switch on only after complete installation and examination of the circuit.
3. Professional electrician for installation and maintenance only.



**Turn Off
Power Supply**

	<p>Step1. Open a hole according to the cutout size of LED downlight</p> 
<p>Step2.</p>  <p>Customer's own junction box</p>	<p>Step3. Hold back the spring clip then push the downlight into the hole.</p> 
<p>Step4. Press upward the body and lock it with spring tightly which located into the hole.</p> 	<p>Step5. Make sure the downlight fixed tightly in ceiling, turn on the power</p>  <p>Turn on the switch</p> 

Caution: Please note that DO NOT use this product in the following places/application.

1. The place has a large quantity of chemical corrosive substance, such as: chemical plant and stockyard etc.
2. The place has poor temperature conditions, large-scale temperature variation, which would easily lead to broken and damage the product, the applicable operating temperature is between -20 and 40 degrees.

