

# VECTA



## DOWN LIGHT

VEC-46194

Description: Architectural downlight LED luminaire for interior applications. Minimal design with high visual comfort, suitable for residential and commercial projects.

### Technical Characteristics

Light Source : SMD LED

Rated Power : 10 W

Luminous Efficacy : 100lm/W

Beam Angle : 24°

CCT : 3000 K / 4000 K / 5700 K

(internal switch) CCT Selection: Internal switch

Colour Rendering Index (CRI):  $\geq 90$

Input Voltage : AC100-270V

Driver : Traic Dimmable

Dimming Protocol: flick driver

Body Material: Aluminium

Diffuser: Polycarbonate

Finish : Gray + Black

Dimensions: 147\*45\*49mm

Ingress Protection: IP20


Operating Temperature :  $-10^{\circ}\text{C}$  to  $+40^{\circ}\text{C}$

Power Factor :  $\geq 0.9$

Installation: recessed ceiling

Lifetime : 30,000 h

Warranty: 3 years

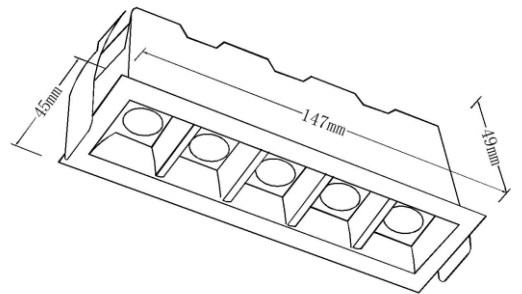

### Polar diagram

